

4

3

2

1

THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBUCATION

LOC

DIST

REVISIONS


P

LTR

DATE

DWN

APVD

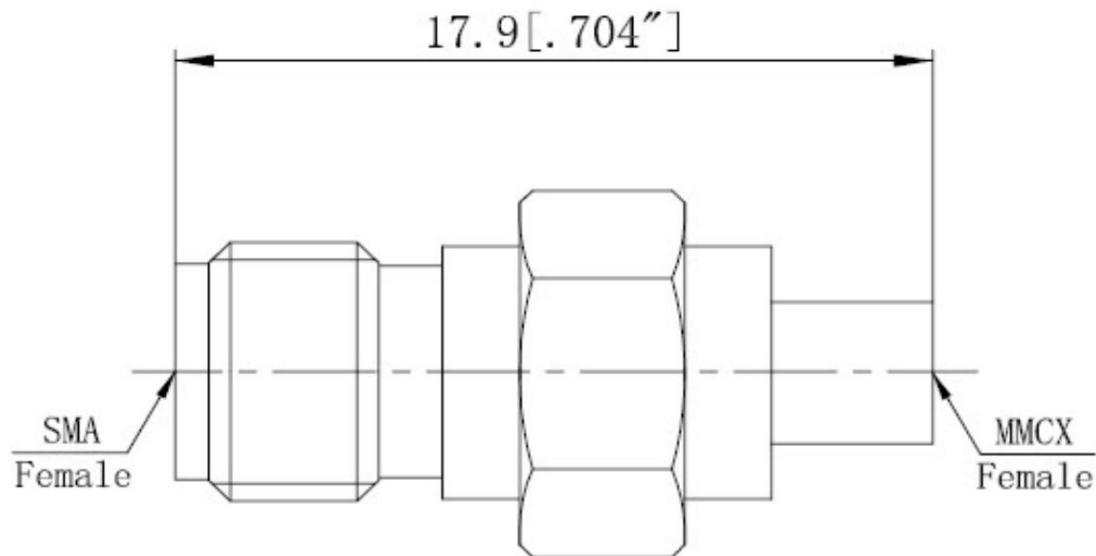

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000M Ω
- 1.3 FREQUENCY RANGE: DC-6 GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE:
750V MAX AT SEA LEVEL
- 1.5 VSWR:
≤1.20:1
- 1.6 INSERTION LOSS: 0.25dB (MAX)



2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +125°

3.MATERIAL AND FINISH:

- 3.1 INNER CONDUCTOR MATERIAL:
BERYLLIUM BRONZE GOLD PLATING
- 3.2 INSULATOR: PTFE
- 3.3 EXTERNAL CONDUCTOR MATERIAL:
BRASS GOLD PLATING

MODEL	A CONNECTOR	B CONNECTOR
XQY-SMA/MMCX-JJTS	SMA-MALE	MMCX-MALE
XQY-SMA/MMCX-KKTS	SMA-FEMALE	MMCX-FEMALE
XQY-SMA/MMCX-JKTS	SMA-MALE	MMCX-FEMALE
XQY-SMA/MMCX-KJTS	SMA-FEMALE	MMCX-MALE

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021	 Shenzhen xinqiyuan Technology Co., Ltd.					
		CHK						
DIMENSIONSMM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 ANGLES ±1°	APVD	NAME SMA Female TO MMCX Female RF Coaxial Adapter					
		APPLICATION SPEC	SIZE A4	CAGE CODE 01021	DRAWING NO XQY-SMA/MMCX-KKTS			
		WEIGHT						
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING			SCALE 2:1	SHEET 1	OF 1	RVE 1

4

3

2

1