


# XQY-PS6-0.6/6-SE

## 精密高频功分/合路器

### precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	600 ~ 6000 MHz
插入损耗 Insertion Loss	≤ 2.9dB (Excluding theoretical loss 未含理论损耗 7.8dB)
输入驻波 Input Port VSWR	Typ.1.21 / Max.145
输出驻波 Output Port VSWR	Typ.1.13 / Max.1.25
隔离度 Isolation	Typ.26dB / Min.18dB
幅度平衡 Amplitude Balance	≤ 0.8dB
相位平衡 Phase Balance	±8°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	SMA-Female
承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
工作温度 Operation Temperature	-35°C ~ +75°C
表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
外形尺寸 Outline Dimensions	150*94*12 (mm)
重量 Weight	385 (g)

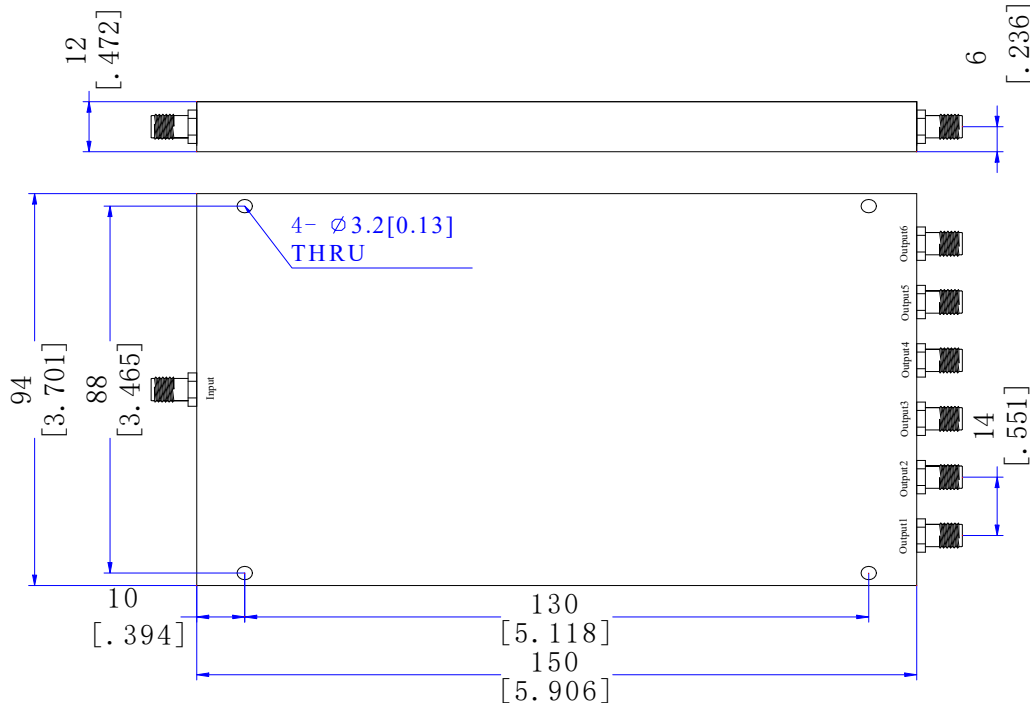

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)