


# XQY-PS2-1/40-KE

## 精密高频功分/合路器

### precision RF power splitter/Combiner


SN	Parameters	Specifications
1	频率范围 Frequency Range	1000~40000 MHz
2	插入损耗 Insertion Loss	≤ 1.8dB (Excluding theoretical loss 未含理论损耗 3.0dB)
3	输入驻波 Input Port VSWR	Typ.1.16 / Max.1.8
4	输出驻波 Output Port VSWR	Typ.1.12 / Max.1.6
5	隔离度 Isolation	Typ.22dB / Min.16dB
6	幅度平衡 Amplitude Balance	±0.4dB
7	相位平衡 Phase Balance	±5°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	2.92mm-Female;
10	承受功率 Power Rating	Splitter 分路器用时 20W; Combiner 合路器用时 1W
11	工作温度 Operation Temperature	-45°C ~ +85°C
12	表面处理 Surface Finishing	Black paint
13	外形尺寸 Outline Dimensions	78*26*10 (mm)
14	重量 Weight	70 (g)

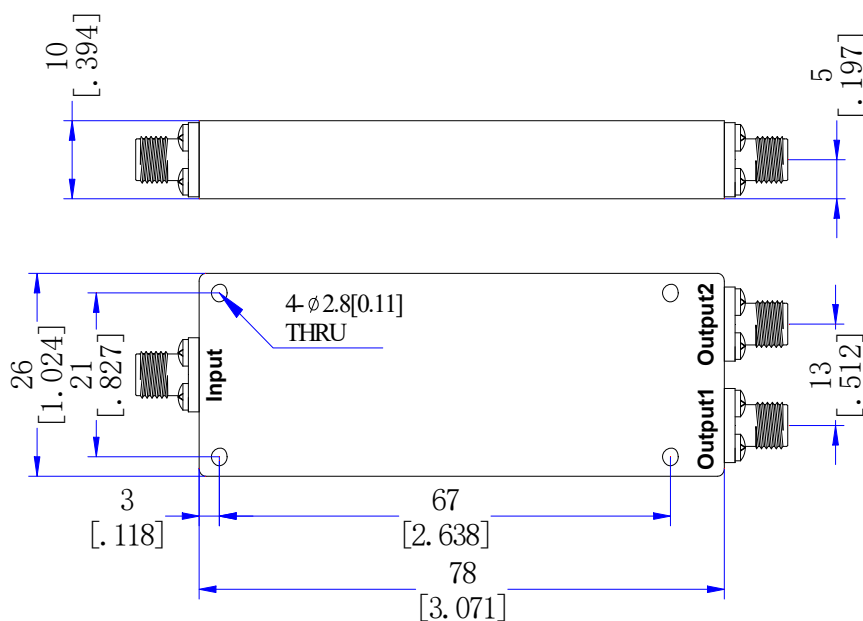


注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)

2020-12-24 14:29

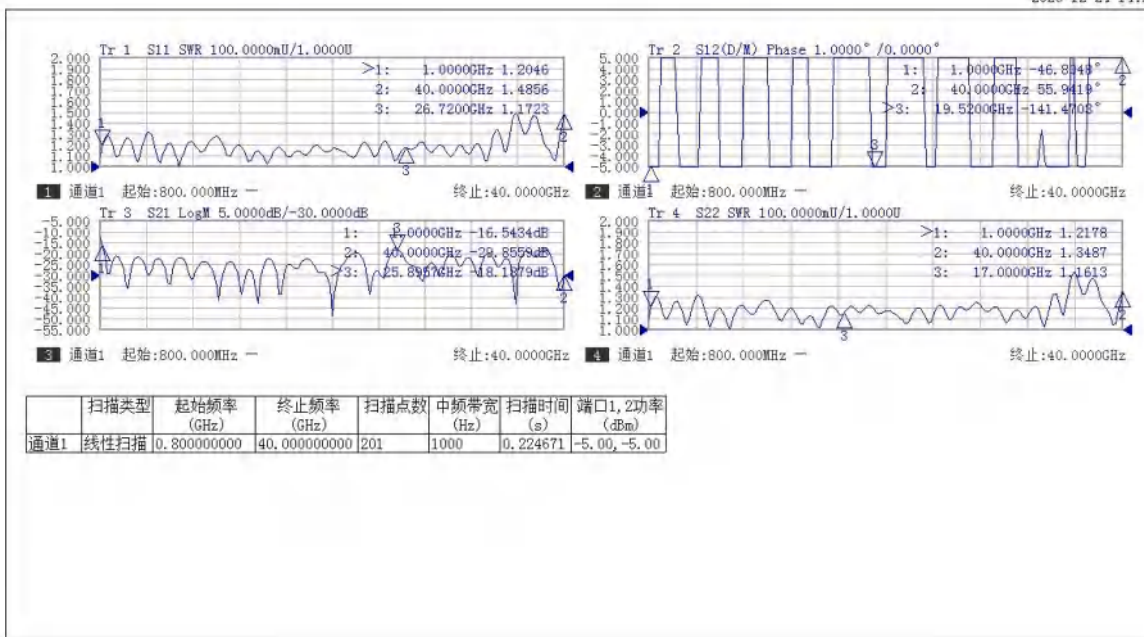

2020-12-24 14:29

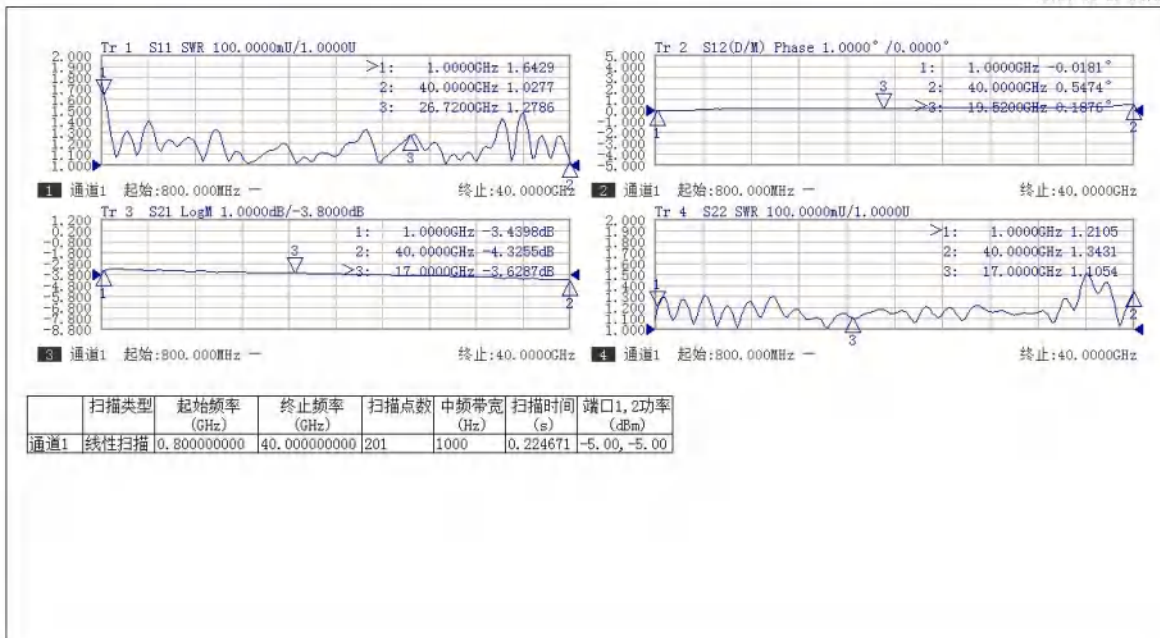

2020-12-24 14:28

